

GLOBAL SYN-T

Product Specification Sheet







R USES


- Landscape
- Lawns
- **Playgrounds**
- Traffic Medians
- Pet Areas
- Commercial or Residential
- Light-Heavy Traffic



15 Year Manufacturer's Warranty 8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

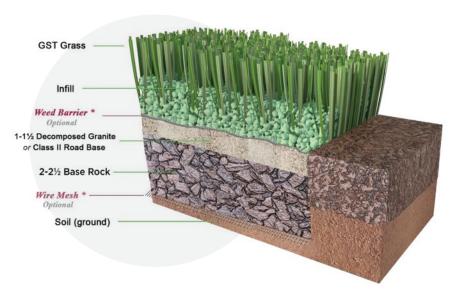

C-SHAPE BLADE

SPECIFICATIONS

Pile Height: 1.75"

Turf Gauge: 3/8"

Face Weight: 92 oz./yd²

Backing Weight: 26 oz./yd2

Total Weight: 118 oz./yd²

Stitch Rate: 20/10cm

Stitches/M²: 19425

Material/Dtex: PE/PP16400

Color: Emerald Green and Olive Green with

Brown and Green Thatching

Type Of Fiber: **PE Monofilament and PP Curled**

As Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium GST Backing

Tuft Bind: 11+ lb/force (ASTM D1335)

Blade Type: C-Shape Blade

Permeability: 120 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: >200 lb./force (ASTM D5034)

Roll Width: 15 If

Roll Length: 75 If

Sq. Ft. Per Roll: 1125

Total Roll Weight: 952 lbs





