

GLOBAL SYN-T

Product Specification Sheet

Spring-50





R USES


- Landscape
- Lawns
- Pet Areas
- Commercial or Residential
- Light-Medium Traffic



15 Year Manufacturer's Warranty 8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

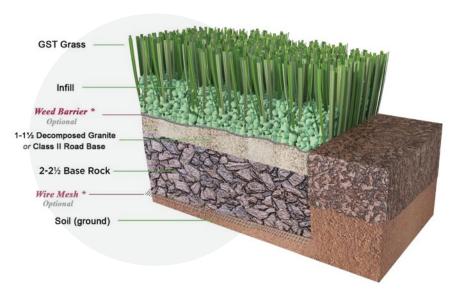

VALLEY BLADE

SPECIFICATIONS

Pile Height: 1.58"

Turf Gauge: 3/8"

Face Weight: 50 oz./yd²

Backing Weight: 25 oz./yd²

Total Weight: **75 oz./yd**²

Stitch Rate: 14.5/10cm

Stitches/M2: 15225

Material/Dtex: PE7950 + PP4000

Color: Field Green and Apple Green with Green and Brown Thatching

Type Of Fiber: **PE Monofilament and PP Curled**

As Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium GST Backing

Tuft Bind: 12+ lb/force (ASTM D1335)

Blade Type: Valley Blade

Permeability: 48.9 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: >190 lb./force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 100 ft

Sq. Ft. Per Roll: 1500

Total Roll Weight: 784 lbs





