




GLOBAL SYN-TURF


GLOBAL SYN-TURF
5960 Inglewood Dr. #150
Pleasanton, CA 94588
TOLL FREE: 1-877-796-8873
FAX: (510) 732-6188
www.globalsynturf.com




SOD STAPLE 6" x 1" x 6"
DRAINAGE PASS THROUGH FOR
WATER IN PUNCHED HOLES
THROUGHOUT BACKING

SEAMING TAPE
SPECIFICATIONS

YARN TYPE POLYPROPYLENE CURLED
PILE HEIGHT 1/2"
TURF GAUGE 3/16"
FACE WEIGHT 46 OZ YD²
BACKING WEIGHT 25 OZ YD²
TOTAL WEIGHT 71 OZ YD²
STITCH RATE 44/10 CM
STITCHES/M² 92400
COLOR BI-COLOR GREEN
ROLL SIZE (FEET) 15' x 100'
MAXIMUM DRAIN RATE >30 INCHES PER HOUR

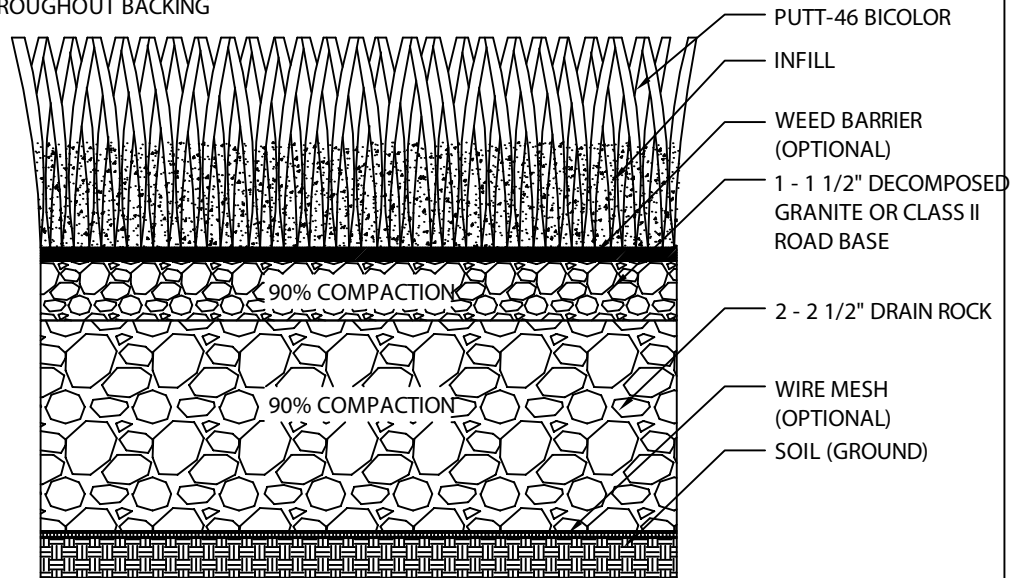

SECTION




SECURING TURF TO BASE
BRIGHT COMMON 40D/60D
NAILS OR GALVANIZED NAILS
6' APART ALONG PERIMETER.

PUSH BROOM AFTER
INSTALLATION IS COMPLETE.

NOTES:

1. THE GRASS MUST BE INSTALLED AND SEAMED WITH ADJACENT PIECES RUNNING IN THE SAME DIRECTION. SEAMS SHOULD BE GLUED WITH SUITABLE SEAMING GLUE AND SEAMING CLOTH, OR GST RECOMMENDED SEAMING TECHNIQUES.
2. COLOR: BI-COLOR GREEN.
3. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
4. DO NOT SCALE DRAWING.
5. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
6. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.



PUTTING GREENS

PUTT-46 BICOLOR